

## Electrical Alarm Contacts

- **Model 821, Magnetic Snap-Action Contact**
- **Model 831, Inductive Alarm Contact**

- **Model 830 E, Electronic Contact**

WIKI Data Sheet AC 08.01

### Applications

- Control and regulation of industrial processes
- Monitoring of plant and switching of electric circuits
- Indication of limit conditions
- Inductive alarm contacts for completely fail-safe switching, even in explosion hazardous areas
- Process industry applications in machine and plant construction, chemical and petrochemical industry, power plants, mining, onshore and offshore and environmental engineering

### Special Features

- High reliability and long service life
- Can be incorporated within all relevant pressure and temperature measuring instruments
- Up to 4 switching contacts per instrument
- Also available with liquid-filled case for high dynamic pressure loads and vibration
- Inductive alarm contact, also available in safety pattern and electronic contact for PLCs

### Description

Electrical alarm contacts make or break an electric control circuit dependent upon the position of the instrument pointer. The alarm contacts are adjustable over the full extent of the scale range (see DIN 16 085), and are mounted predominantly below the dial, though also partly on top of the dial.

The instrument pointer (actual value pointer) moves freely across the entire scale range, independent of the setting. Both circular gauges and square panel-mounted gauges feature an adjustment key in the centre of the window. Contacts in flush panel-mounted gauges are adjustable using a screwdriver through the window. Alarm contacts consisting of several contacts can also be set to a single setpoint. Contact actuation is made when the actual value pointer travels beyond or below the desired set value.



**Pressure Gauge Model 212.20.100  
with Model 821 Electrical Alarm Contact**



**Thermometer Model 55 with  
Model 831 Electrical Alarm Contact**

### Options

#### Gauges with special approvals on inquiry, e.g.

- Pressure limiters or pressure switches in accordance with VdTÜV's pressure bulletin 100/1
- Pressure switches with DVGW approval (DIN 3398 / EN 1854)
- Pressure and temperature measuring instruments with alarm contacts for intrinsically safe electrical systems (mining)
- Pressure gauges for connection to Zone 20 dust explosion hazardous areas or to Zone 0 hazardous areas

## Model 821 magnetic snap-action contacts <sup>1)</sup>

### Application

This contact can be used in a whole range of operating conditions, including with liquid-filled instruments. The set pointer has an adjustable permanent magnet attached, giving a snap-action characteristic which strengthens the contact force. This snap-action behaviour provides further protection of the contacts against harmful arcing effects, though it increases the hysteresis from 2 % to 5 % of the measuring range.

The hysteresis is the difference in indicated value measured from opposing directions of travel with the switch point unaltered. The signal is made either before or after mating, dependent upon the movement of the instrument pointer.

- 1) Particularly for temperature measurement, where bimetal measuring systems only have very low actuating power and if the operating conditions are such that there is no vibration, the model 811 sliding contacts should be used. This type of contact is not suitable for liquid-filled instruments.

### Specifications and contact ratings table

Observing the data supplied will ensure many years of problem-free operation for the alarm unit. For higher loads (max. 1840 VA), and also for liquid-filled gauges, we recommend our model 905.1X contact protection relays (page 7).

In accordance with DIN 16 085, requirements on pressure measuring instruments with contacts for switching currents less than 24 V DC should be agreed specifically between the user and manufacturer.

### Attention!

**For low ratings, to maintain reliability, the current to be switched should not be less than 20 mA.**

**In order to ensure more reliable contact switching, taking environmental influences over the long term into account as well, the switching voltage should not be below 24 V.**

For switching inductive or capacitive loads, you should take the usual measures for protecting contacts from erosion. For Programmable Logic Controllers (PLC) we recommend our model 830 E electronic contacts (see page 11 onwards).

## Specifications

Maximum contact rating with resistive load	Magnetic snap-action contact, Model 821		Sliding contact, Model 811
	dry gauges	liquid-filled gauges	dry gauges
Maximum voltage (MSR) $U_{eff}$	250 V	250 V	250 V
Current ratings: <sup>1)</sup>			
Make rating	1.0 A	1.0 A	0.7 A
Break rating	1.0 A	1.0 A	0.7 A
Continuous load	0.6 A	0.6 A	0.6 A
Maximum load	30 W / 50 VA	20 W / 20 VA	10 W / 18 VA
Material of contact points	Silver-Nickel Alloy (80 % Ag / 20 % Ni / 10 µm gold-plated)		
Ambient operating temperature	-20 ... +70 °C		
Max. no. of contacts	4		

<sup>1)</sup> The values given for nominal working currents apply to instrument designs with Switch Version S. For Version L, these values should be halved. (See table on page 3 for appropriate version)

## Recommended contact ratings with resistive and inductive loads

Voltage (DIN IEC 38) DC / AC	Magnetic snap-action contact, model 821			Sliding contact, model 811		
	dry gauges			dry gauges		
	resistive load		inductive load	resistive load		inductive load
V	DC mA	AC mA	cos φ > 0.7 mA	DC mA	AC mA	cos φ > 0.7 mA
220 / 230	100	120	65	65	90	40
110 / 110	200	240	130	130	180	85
48 / 48	300	450	200	190	330	130
24 / 24	400	600	250	250	450	150

## Contact point materials

Depending upon the switching conditions, the alarm contacts are subjected to greater or lesser erosion due to the effects of the unavoidable arcing and through mechanical wear. As a result, when selecting the contact material, attention should be paid to the predominant operating conditions.

The following contact materials are available:

### Silver-nickel alloy

(80 % silver / 20 % nickel / 10 µm gold-plated)

Material properties:

- Excellent hardness and strength.
- Good resistance against arcing.
- Low inclination to fuse together.
- Low contact resistance.

Due to its good balance of properties and wide application possibilities, this alloy is used as our standard material.

### Platinum-iridium alloy

(75 % platinum, 25 % iridium)

This alloy has outstanding chemical resistance, as well as being hard and very resistant to arc formation. It is used for high switching frequencies, high switching currents and in aggressive environments.

## Special designs

- Contacts with separate circuits
- Changeover contacts (open and closed simultaneously for the same setpoint)
- Switch point fixed.
- Linked contacts
- Contacts with 47 kW „live zero“ shunt to monitor circuit continuity
- Self-cleaning contacts (NS 160 only)
- Contact setting lock with lead sealing
- Non-detachable contact setting key
- Plug connection (instead of junction box or flying lead)
- Contact points of special platinum-iridium alloy

### Switch version appropriate to gauge model and range

(in order to define limits, please refer to the table at the top of page 2 and footnote)

WIKA basic gauge model	Nominal size	Number of contacts in instrument	Measuring ranges	Switch version
2XX.XX	100 and 160	1	≤ 1 bar	L
2XX.XX	100 and 160	1	all others	S
2XX.XX	100 and 160	2	≤ 1.6 bar	L
2XX.XX	100 and 160	2	all others	S
2XX.XX	100	3 or 4	≤ 4 bar	L
2XX.XX	100	3 or 4	all others	S
2XX.XX	160	3 or 4	≤ 2.5 bar	L
2XX.XX	160	3 or 4	all others	S
214.11	96 x 96 and 144 x 144	1	≤ 1 bar	L
214.11	96 x 96 and 144 x 144	1	all others	S
214.11	96 x 96 and 144 x 144	2	≤ 1.6 bar	L
214.11	96 x 96 and 144 x 144	2	all others	S
214.11	96 x 96	3	≤ 4 bar	L
214.11	96 x 96	3	all others	S
214.11	144 x 144	3	≤ 2.5 bar	L
214.11	144 x 144	3	all others	S
3XX.XX	160	1 ... 4	all	L
4XX.XX	100 and 160	1 ... 4	all	L
5XX.XX	100 and 160	1 ... 4	all	L
6XX.XX	100 and 160	1 or 2	≥ 100 mbar	L
7XX.XX	100 and 160	1 ... 4	all	L
55	100 and 160	1 ... 4	all	L
73	100 and 160	1 ... 4	all	L

## Contact function index

For the switch functions for model 821 magnetic snap-action contacts and model 811 sliding contacts the following generally applies for our default settings:

















- Index 1** Contact **makes** when the **instrument pointer** approaches the set point **in a clockwise direction**. (NO contact)
- Index 2** Contact **breaks** when the instrument pointer approaches the set point **in a clockwise direction**. (NC contact)
- Index 3** Contact **first breaks and then makes a second circuit** when the instrument pointer approaches the set point in clockwise direction. (SPDT contact)

For alarm contacts with several contacts, the 1<sup>st</sup> contact is the one which is closest to the left-hand beginning of the scale, or end value (for vacuum gauges).

**The switch function**, described in the following table, **follows the clockwise rotary motion** of the instrument pointer (actual value pointer).

If the actual value pointer moves **anticlockwise**, the **reverse switch function** occurs!

**Note:** If the alarm contacts are to be set (adjusted) anticlockwise, the index figures in brackets must be used in accordance with DIN 16 085. Combinations are possible.

Single contacts <sup>1)</sup>			
Wiring scheme	Clockwise pointer motion Contact function		Model code and <b>function index</b> for magnetic snap-action contacts or sliding contacts (special version)
	Contact makes when pointer reaches set point (NO - normally open)		821.1 and 811.1 (.5)
	Contact breaks when pointer reaches set point (NC - normally closed)		821.2 and 811.2 (.4)
	SPDT: 1 contact breaks and 1 contact makes when pointer reaches set point (change over)		821.3 and 811.3 (.6)
Double contacts <sup>1)</sup>			
	1st and 2nd contact make when pointer reaches set point		821.11 and 811.11 (.55)
	1st contact makes 2nd contact breaks when pointer reaches set point		821.12 and 811.12 (.54)
	1st contact breaks 2nd contact makes when pointer reaches set point		821.21 and 811.21 (.45)
	1st and 2nd contact break when pointer reaches set point		821.22 and 811.22 (.44)
Triple contacts <sup>1)</sup>			
	1st contact breaks 2nd contact makes 3rd contact breaks when pointer reaches set point		821.212 and 811.212 (.454)

<sup>1)</sup> When ordering, please include the appropriate function index with the contact model number (follow the sequence of 1st, 2nd 3rd contact), see example 821.212.

The **connecting terminals** and/or **connecting wires** are specified according to the table above.  
**Configurations which are possible** are found on pages 18/19.

## Causes of overload for magnetic snap-action contacts

### General

Each mechanical switch has 4 physical limits. These are:

- Maximum electrical switching voltage
- Maximum electrical switching current
- Maximum electrical power to be switched
- Maximum mechanical switching rate

The switch must not be operated outside of these physical limits. The operating life of the switch will be reduced even if only one of these limits is exceeded during operation. The further one or more of these limits is exceeded, the greater the reduction in the operating life of the contact; even to the point of immediate failure.

## Causes of electrical overload

### Maximum electrical switching voltage

When an electrical load is switched, to a greater or lesser degree, an electrical arc can be seen between the contact points. The very high local heating caused by this leads to the gradual evaporation of the contact material with each switching operation (material erosion, burn-off). The higher the voltage that is switched, the greater arc is produced and thus the faster the contact material evaporates. Long-term damage occurs to the contacts.

### Maximum electrical switching current

When an electrical current is switched, the contact surfaces are heated by the electron flow (contact resistance). If the maximum permissible switching current is exceeded, the contacts will stick to each other. This can lead to the contact points welding or sticking. Long-term damage occurs to the contacts.

### Maximum electrical power

The maximum electrical power that a contact can switch is the product of the switching voltage and the switching current. This electrical power heats the contacts and the limit must not be exceeded (welding, sticking). Long-term damage occurs to the contacts.

### Maximum mechanical switching rate

The maximum mechanical switching frequency possible depends upon both the wear of the bearings and material fatigue.

### Minimum electrical values

Each mechanical contact also possesses a threshold resistance resulting from surface contamination (surface contamination resistance  $R_F$ ).

This surface contamination resistance results from the oxidation or corrosion of the contact surfaces and increases the electrical resistance of the switch.

When switching at low power, this layer will not be penetrated.

Only by switching with higher currents and voltages will this be destroyed. This effect is known as fritting, and the minimum voltage needed for it is the fritting voltage.

If this voltage is not reached with switching, the contamination layer resistance will continue to grow and the switch will cease to work.

This effect is reversible.

### Further information

Such an electrical overload can be caused by the following (e.g.):

- Light bulbs draw 15 times as much current at the moment of switching than they do in normal operation (nominal value).
- Capacitive loads form a short-circuit at the moment of switching (long control cables, cables running in parallel).
- Inductive components (relays, contactors, solenoid valves, wound cable drums, electric motors) create very high voltages when switching (up to 10 times the nominal voltage).

## Measures to protect the contacts


Mechanical contacts must not exceed their specified electrical limits for switching current and voltage, even for a short time.

For capacitive or inductive loads we recommend one of the following protective circuits:

### 1. Inductive load for DC voltage

With DC, the contact protection can be achieved via a freewheeling diode, connected in parallel to the load.


The polarity of the diode must be arranged so that it closes when the operating voltage is on.

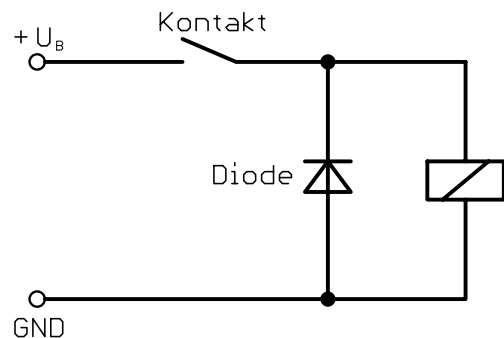


Example: protecting the contacts with a freewheeling

## 2. Inductive load with AC

There are two protection possibilities with AC voltage.

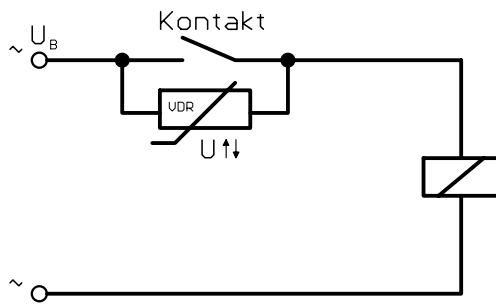

**Example: Contact protection via a voltage dependent resistance (VDR)**

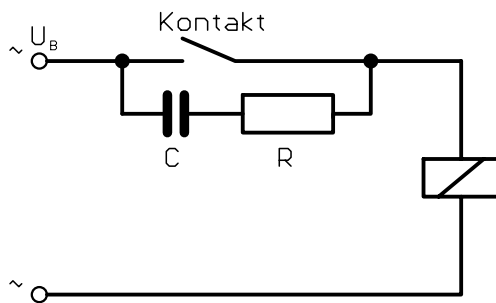

**Example: Contact protection via an RC-circuit**


### Contact curve

The hatched area of the contact curve shows the permissible electrical values for the respective contact.

The voltage to be switched must neither be over the maximum, nor below the minimum switching voltage ( $V_{\max} \leq U_s \leq V_{\min}$ ).


The current to be switched must neither be over the maximum, nor below the minimum switching current ( $A_{\max} \leq I_s \leq A_{\min}$ ).

The power to be switched should only lie below the limit curve.

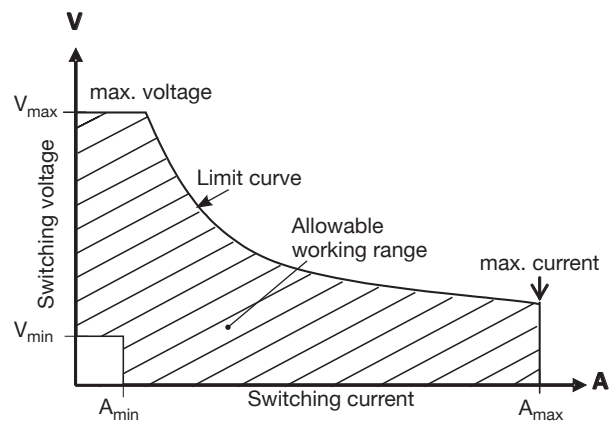

## 3. Capacitive Loading

With capacitive loads, elevated switch-on currents arise. These can be reduced while connecting a series resistor in the switching circuit.

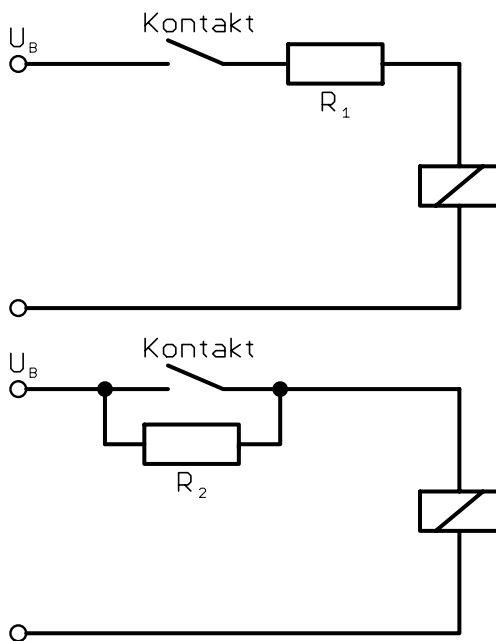

**Example: Contact protection via a current-limiting resistance**

## Control relays

Contact protection relays are used with model 821 and 811 contact relays if the permissible contact rating of the contacts is not sufficient.

The contact protection relays are triggered by the alarm contacts and switch the load.

On the contact side, they operate with a low control voltage, however, on their output side they have a high power rating.

Contact protection relays consist of a power unit, a control unit, a switching amplifier and a relay output.

The contacts are supplied from the control unit with a clocked DC voltage of between 35 to 40 V (meaning that only every hundredth or so switching occurs under voltage). In this way, optimal contact protection switching safety is achieved for several million switch cycles.

Liquid-filled gauges with contacts, which switch frequently, should generally be used in conjunction with contact protection relays. The filling increases the service life of the mechanical measuring systems, but at the same time it increases the erosion of the contact points.

As well as the outputs to operate the contacts, an additional 24 V DC output with (max. 20 mA) is available. This can drive, for example, indicator lights or transmitters.

In order to avoid unintended switching, through (for example) vibration, the switch signal must be present for a minimum of 0.5 seconds before the output from the contact relay switches (switch-off delay).

## Overview of models

Model	For connection to instruments	Function / output	
<b>905.12</b> <b>MSR 010</b>	with 1 contact	1 double throw contact	
<b>905.13</b> <b>MSR 020</b>	with 2 contacts	2 double throw contacts	
<b>905.14</b> <b>MSR 011</b>	with 2 contacts (Function 21 must be specified)	1 double throw with flip-flop characteristic (interval switch for control- ling pumps)	




## Specifications

## Control relays Model 905.12 ... 14

Line voltage	AC 230 V -10 % / +6 %, 45 ... 60 Hz
Power consumption	ca. 2.5 VA
Pulsating current voltage	35 to 40 V; Isolated transformer
Pulse rate	1 : 100 typically
Pulse width	250 µs typically
Relay time lag	ca. 0.5 s
Relay output	potential-free, mono or bistable double throw contact (see review of available models)
■ Contact rating	AC 250 V, 8 A, 1840 VA
Auxiliary output	DC 24 V
■ Current rating	20 mA
Wiring identification	DIN 45 410
Protection	Insulated system
Insulation class	C/250 V per VDE 0110
Enclosure size	Form C, page 11
Enclosure material	Polyamide 6.6, green
Ingress protection EN 60 529 / IEC 529	Case IP 40, Terminals IP 20
Operating temperature	0 ... 70 °C
Mounting	Snap-mounting on DIN 50 022 rail 35 x 7.5 mm (Surface mounting adaptor included)

### Connection examples for control relays

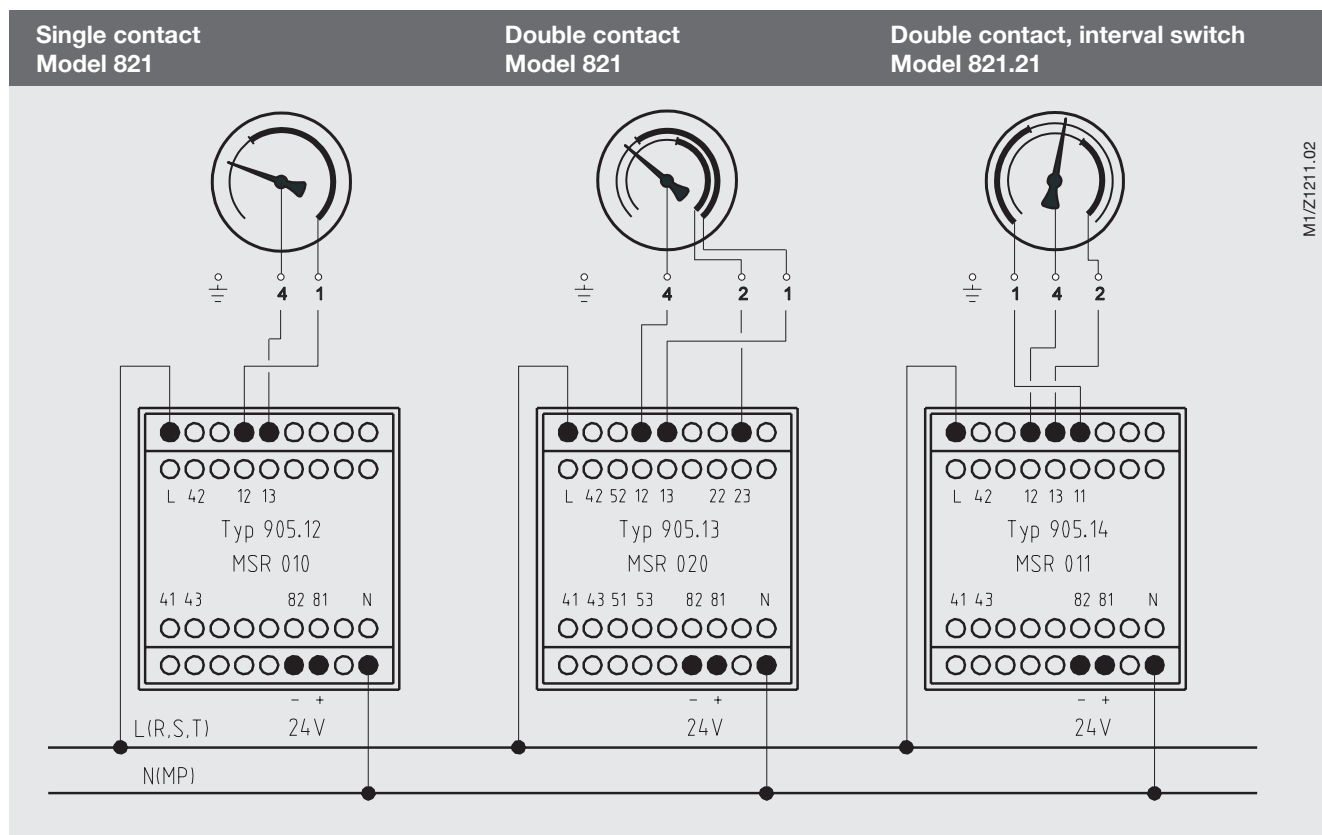



## Inductive alarm contact model 831

### Application

Measuring instruments with WIKA inductive alarm contacts may be operated in Zone 1 and 2 explosion hazardous areas. Provided that they are powered from a suitable and certified control circuit (e.g. WIKA model 904.15 control unit). Outside of Ex areas, WIKA inductive alarm contacts are primarily used where particularly safe switching at higher switching rates is important.


Since these contacts also work in liquid filling, such instruments are themselves usable in very particular operating conditions. Some typical application areas are those in chemical, petrochemical and nuclear plants.

### Operating principle

The WIKA inductive alarm contact works in a non-contact way. Essentially it consists of the control head (initiator), attached to the set pointer, with its fully-potted electronics and the mechanical assembly with the moving flag. The flag is moved by the instrument pointer (actual value pointer).

The control head is supplied with a DC voltage. When the flag enters the slot in the control head this then increases its internal resistance (= damped condition/initiator has high-impedance). The subsequent change in the current acts as the input signal for the switching amplifier of the control unit.

### Functional diagram

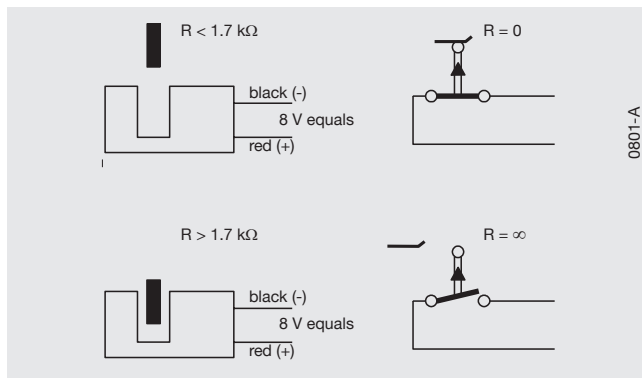

The control unit works, practically, without any reaction on the measuring system. The non-contact “contact system” produces no wear within the electrical system. The installed dimensions correspond to those of the model 821 contacts. The setting of the setpoints is made in the same way as for those contacts.

Ambient temperature: -25 °C ... +70 °C 1)

Sensor used (slot-type initiator): Pepperl and Fuchs Type SJ, EC Type-test Certificate PTB 99 ATEX 2219 X and ZELM 03 ATEX 0128 X

1) For use in hazardous areas, the upper limits for the ambient temperature mentioned in the test certificate must be complied with! These depend on voltage, current rating, power consumption and temperature class.

### Advantages of the WIKA inductive system

- Long service life due to non-contact sensor
- Low reaction to on the display
- All-purpose, also with liquid filled gauges
- Fully suitable for corrosive or hazardous atmospheres (potted electronics, non-contact switches)
- Ex-approved for service in Zone 1 or 2 hazardous areas (intrinsic safety)

### Components of the WIKA inductive contact system

The WIKA inductive contact system includes the WIKA Inductive alarm contacts, built into the instrument, (already described) and the WIKA control unit (see page 13).

The WIKA **control unit** consists of

- Line transformer
- Switching amplifier
- Output relay

The line transformer converts the AC supply voltage to a DC voltage. The switching amplifier drives the control head and switches the output relay. Via the output relay, higher electrical loads can be switched.

Two **versions of the control units** are available

- Ex-approved **intrinsic safety**
- Standard for **non intrinsically safe** version

The intrinsically safe version meets to EN 50 014 / 50 020 and is type-tested. With these, inductive contacts can be used in Zone 1 or Zone 2 hazardous areas.

**Note:** The control unit itself must be installed outside the hazardous area.

The switching characteristic of the control unit can be set via wire jumpers and/or sliding switches. This enables the action of the switching function to be reversed, e.g. the flag can cause the sensor

- output relay to be either energised or de-energised.

In addition, it is possible to configure line break monitoring.

With **non intrinsically safe control units**, inductive alarm contacts must not be operated in explosion hazardous areas. Their direction of action is permanently fixed. The output relay is de-energised when the flag passes through the air gap. The line break monitoring is in series. Apart from the outputs required for the operation of the alarm contacts, there is an additional output with a direct 24 V voltage (max. 20 mA). This additional output can be used, for example, to supply the indicator lights.

## Contact function index

For the switch functions for model 831 inductive alarm contacts the following generally applies for our default settings:

**Index 1** Contact **makes** when the **instrument pointer** approaches the set point **in a clockwise direction**. (Flag leaves control head)

















**Index 2** Contact **breaks** when the **instrument pointer** approaches the set point **in a clockwise direction**. (Flag enters control head)

For alarm contacts with several contacts, the 1<sup>st</sup> contact is the one which is closest to the left-hand beginning of the scale, or end value (for vacuum gauges).

**The switch function**, described in the following table, **follows the clockwise rotary motion** of the instrument **pointer** (actual value pointer).

If the actual value pointer **moves anticlockwise**, the **reverse switch function** occurs!

**Note:** If the alarm contacts are to be set (adjusted) anticlockwise, the index figures in brackets must be used in accordance with DIN 16 085. Combinations are possible.

Single contacts <sup>1)</sup>				
Wiring scheme <sup>2)</sup>	With <b>clockwise</b> pointer motion, when pointer reaches set point, the flag:	Contact function (principle)		Model code and <b>function index</b> of contacts
	Leaves the sensor	Contact makes (NO-normally open)		831.1 (.5)
	Enters the sensor	Contact breaks (NO-normally closed)		831.2 (.4)
Double contacts <sup>1)</sup>				
	Leaves 1st and 2nd	1st and 2nd contact make	 	831.11 (.55)
	1st leaves, 2nd enters	1st contact makes, 2nd contact breaks	 	831.12 (.54)
	1st enters, 2nd leaves	1st contact breaks, 2nd contact makes	 	831.21 (.45)
	1st and 2nd enters the sensor	1st and 2nd contact breaks	 	831.22 (.44)
Triple contacts <sup>1)</sup>				

A number of instruments will also accept triple inductive contacts (see page 18/19).

Technical notes page 11

Wiring schemes and possible characteristics are the same as above.

1) When ordering, please include the appropriate function index with the contact model number (follow the sequence of 1<sup>st</sup>, 2<sup>nd</sup> 3<sup>rd</sup> contact).

2) Thin line: Flag enters control head, circuit open.  
Bold line: Flag leaves control head, circuit closed.


**Wiring terminals** are identified according to the above wiring schemes.

**Configurations possible** for individual instruments are found on pages 18/19.

### Triple inductive contact

With triple inductive contacts it is not possible to set all three contacts overlapping at the same scale value. Either the left (= no. 1 contact) or the right contact (= no. 3 contact) must be at an approximate separation of 30° to the left or the right of the other two contacts, which may be set to the same value:

#### Examples

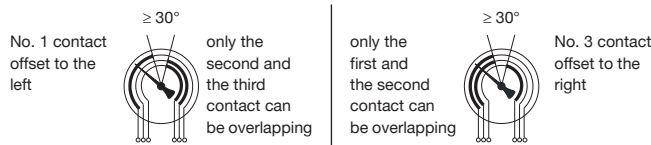

### All possible configurations of triple inductive contacts:

1st contact not overlapping      3rd contact not overlapping

Model	Model
831.1.11	831.11.1
831.1.12	831.11.2
831.1.21	831.12.1
831.1.22	831.12.2
831.2.11	831.21.1
831.2.12	831.21.2
831.2.21	831.22.1
831.2.22	831.22.2

## Inductive contacts - Special designs

### ■ Fail-safe inductive contacts models 831 SN and 831 S1N

For particularly important, safety-relevant applications, such as for fitting to self-monitoring controls, type-tested components must be used. The model 831 SN and 831 S1N fail-safe inductive alarm contacts have the appropriate certificates. It is a requirement that they must be used in conjunction with a similarly certified, fail-safe control unit (switching amplifier), e.g. model 904.30 KFA6-SH-Ex1 (see page 14).

Measuring instruments with fail-safe inductive alarm contacts may be operated within Zone 1 explosion hazardous areas.

Control unit used (SN/S1N slot-type initiator): Pepperl and Fuchs Type SJ, EC-Type-test Certificate PTB 00 ATEX 2049 X and ZELM 03 ATEX 0128 X

### Switching characteristics, model 831 SN

When the flag is positioned within the slot initiator, the output of the series-connected control unit (0-signal) is **blocked**, i.e. the output relay is **released** / (= **alarm condition**).

Contact function indices, flag behaviour and wiring schemes are identical to model 831 (see page 10).

### Switching characteristics, model 831 S1N

When the flag is positioned **outside** of the slot initiator, the output of the series-connected control unit (0-signal) is **blocked**, i.e. the output relay is **released** / (= **alarm condition**).

Contact function index scheme is the same as that for model 831 SN with the following differences:

**Index 1** (following the contact model no.) means contact **makes** when set point is reached in a clockwise direction (**flag enters** control head).

**Index 2** (following the contact model no.) means contact **breaks** when set point is reached in a clockwise direction (**flag leaves** control head).

Possible configurations as shown in the tables on pages 18/19.

### ■ Triple inductive contact NS 160, one set point for all three contacts

If it is absolutely necessary to set all three contacts to the same value, this can be achieved with the NS 160 design using smaller control heads. Please specify when ordering.

### ■ Quadruple contacts

The panel-mounting pressure gauges NS 144 x 72 can accept up to 4 inductive contacts (see page 18).

## Electronic contact model 830 E

### Description, Application

Direct switching of small loads, which are usually required for a PLC, can be realised by this inductive alarm contact with integrated amplifier, which is factory-installed into the measuring instrument.

The usual advantages of inductive contacts, such as fail-safe contact operation, no wear due to proximity contact operation as well as virtually no effect on the measuring system, thus ensuring the accuracy of the indication, also apply here.

### An additional control unit is not required.

The electronic contact with PNP output can be specified in either a 2- or 3-wire design.  
The operating voltage is 10 ... 30 V DC. The maximum switching current is 100 mA.

The model 830 E electronic contact is **not intrinsically safe** and therefore not suitable for applications where explosion protection is required.

See page 13 for further technical data.

The contact function index is the same as that for the model 831 alarm contact with the following differences:

**Index 1** (following the contact model no.) means the contact makes when the set point is reached in a clockwise direction (flag enters control head)

**Index 2** (following the contact model no.) means the contact breaks when the set point is reached in a clockwise direction (flag leaves control head)

**Note:** This operation is directly opposite to that of model 831!

### Wiring details

The control and switching electronics are in the sensor; the electrical connection is via a terminal box.

■ To connect to a PLC or for the direct switching of small loads

■ PNP transistor

With PNP switching apparatus, the switched output is connected to PLUS. The load  $R_L$  between the switched output and the MINUS should be specified so that the maximum switching current (100 mA) is not exceeded.


■ Flag leaves slot sensor:

contact breaks (output not active)


■ Flag enters slot sensor:

contact makes (output active)

### 2-wire system

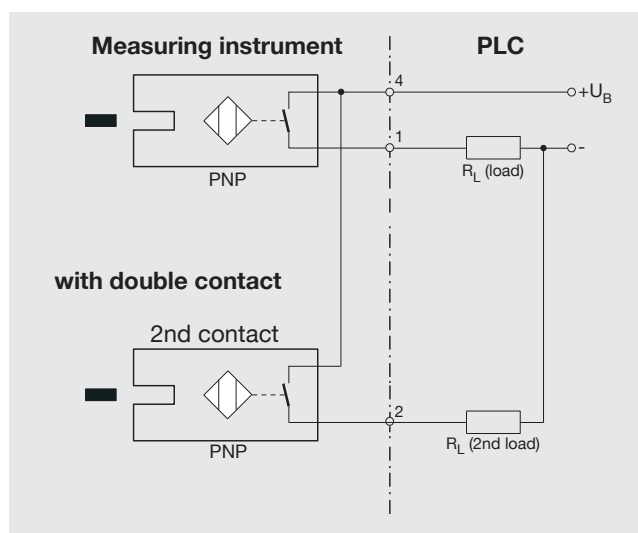

### 3-wire system

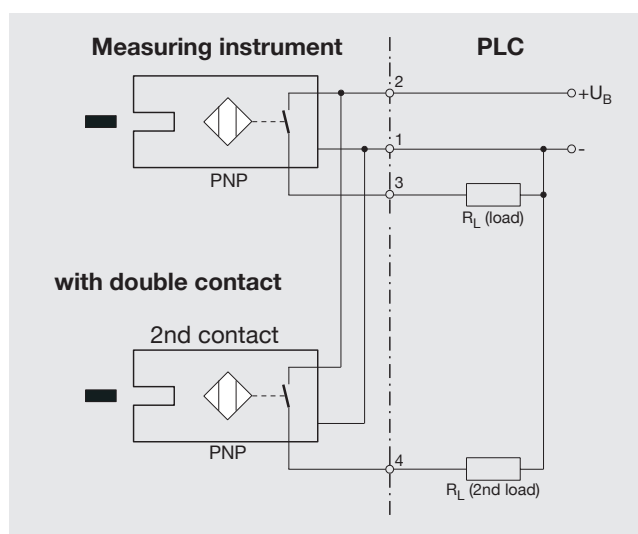


## Specifications

## Electronic contact model 830 E


Range of operating voltage	DC 10 ... 30 V
Residual ripple	max. 10 %
No-load current	$\leq 10$ mA
Switching current	$\leq 100$ mA
Leakage current	$\leq 100$ $\mu$ A
Function of switching element	normally open (make contact)
Type of output	PNP transistor
Voltage drop (with $I_{\max.}$ )	$\leq 0.7$ V
Protection against pole reversal	conditional UB (the output 3 or 4 switch must never be set directly to minus)
Anti-inductive protection	1 kV, 0.1 ms, 1 k
Oscillator frequency	approx. 1000 kHz
EMC acc.	EN 60 947-5-2
Ambient conditions and temperature	depends on measuring instrument
Installation	installed directly in the measuring instrument at the factory, maximum 2 alarm contacts

## Dimensions of control units for inductive contacts


**Form C**

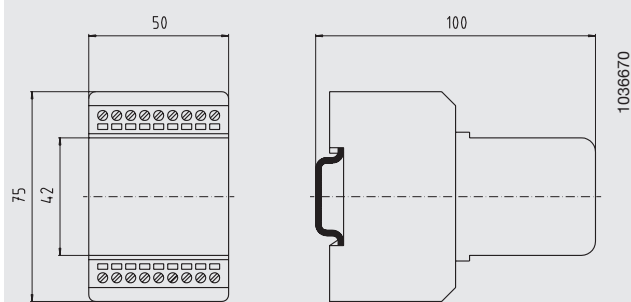


**Form E**

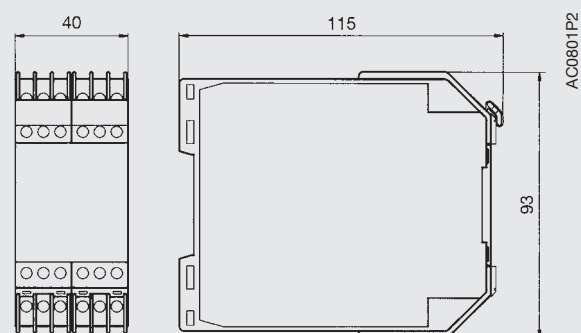

**Form D**

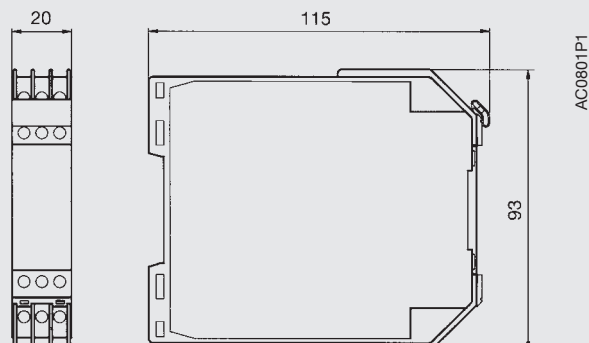

**Form F**

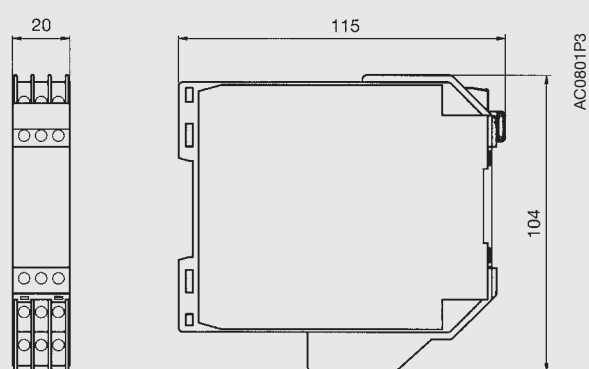

## Control units for inductive contacts

### Ex-certified versions (Connect. examples see page 21)


#### Control unit model 904.28 KFA6-SR2-Ex1.W

- For instruments having one inductive contact incorporated
- Alarm circuit certified intrinsically safe [EEx ia] IIC to EN 50 227 and NAMUR
- 1 SPDT relay contact
- LED indicating circuit status (green), relay output (yellow) and line break (red)
- Surface-mounting case of Form D

#### Note

Direction of action adjustable by sliding switch S1:

OPEN CIRCUIT CAUSES ALARM: switch S1 in position I  
 CLOSED CIRCUIT CAUSES ALARM: switch S1 in position II  
 CONTINUITY DETECTION: switch S3 in position I

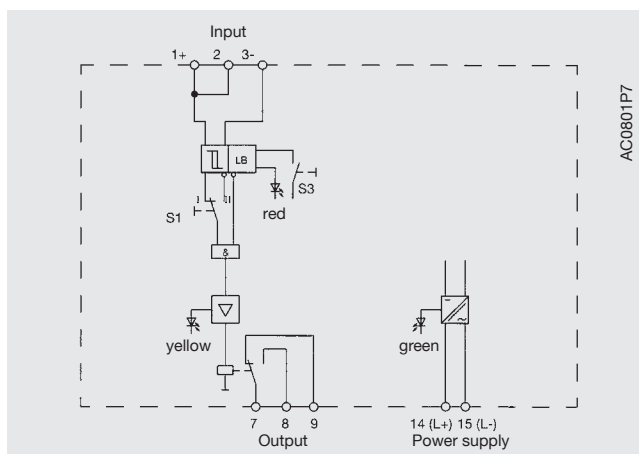


#### Control unit model 904.29 KFA6-SR2-Ex2.W

- For 1 instrument having two contacts, or two instruments each having one contact incorporated
- Alarm circuit certified intrinsically safe [EEx ia] IIC to EN 50 227 and NAMUR
- 2 SPDT relay contacts
- LED indicating circuit status (green), 2 x relay output (yellow) and 2 x line break (red)
- Surface-mounting case of Form F

#### Note

Direction of action adjustable by sliding switches S1 and S2:  
 OPEN CIRCUIT CAUSES ALARM: switch S1 and S2 in position I  
 CLOSED CIRCUIT CAUSES ALARM: switch S1 and S2 in pos. II  
 CONTINUITY DETECTION: switch S3 in position I

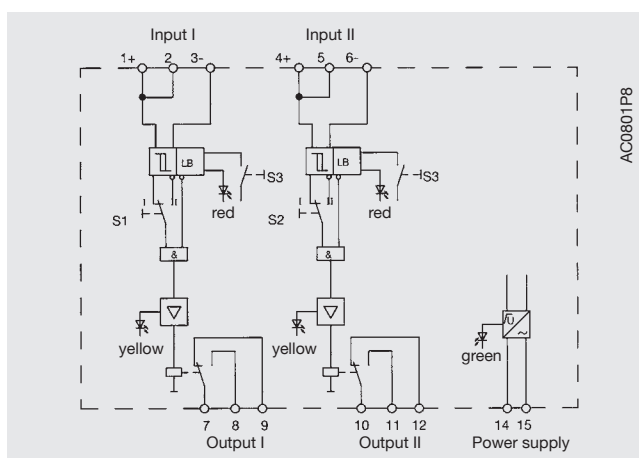


#### Fail-safe control unit

For important fail-safe switching, type-tested components must be used. The SN and S1N fail-safe inductive alarm contacts have such approvals (see page 11) When these alarm contacts are used in conjunction with model 904 fail-safe control units, the arrangement conforms to the TÜV safety-technical requirements for important switching and self-monitoring. When an error arises (mechanical failure, voltage loss, component breakdown, short-circuit, line break) within the circuit, the output always reverts to the fail-safe condition.

#### Model 904.30 KHA6-SH-Ex1

- Fail-safe circuit control unit
- For instruments having one SN- or S1N-type contact incorporated
- Alarm circuit certified intrinsically safe [EEx ia] IIC
- 1 fail-safe relay output, 1 serially switched output and 1 passive transistor error message output
- LED indicating circuit status (green), relay output (yellow) and line break and short circuit (red)
- Surface-mounting case of Form E

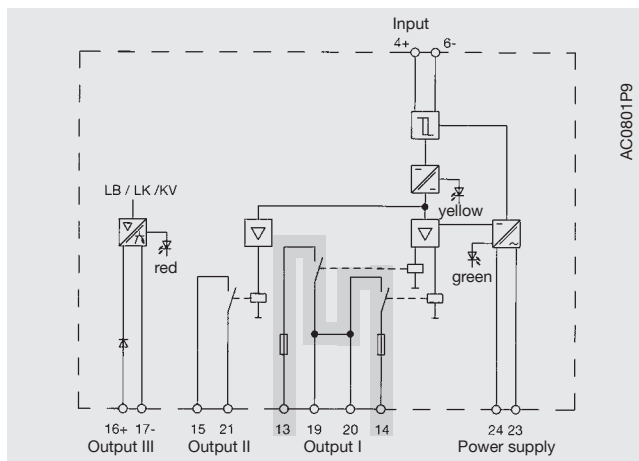

Specifications for control units	Model 904.28 KFA6-SR2- Ex1.W	Model 904.29 KFA6-SR2- Ex2.W	Model 904.30 fail-safe KHA6-SH-Ex1
<b>Power supply</b>			
Line voltage	AC 230 V $\pm$ 0 %, 45 ... 65 Hz	AC 230 V $\pm$ 0 %, 45 ... 65 Hz	AC 85 ... 253 V, 45 ... 65 Hz
Power consumption	1 VA	1.3 VA	3 VA
<b>Input</b>			
No. of contacts	1	2	1
Voltage (reactive)	DC 8 V	DC 8 V	DC 8.4 V
Maximum current	8 mA	8 mA	11.7 mA
Contact actuation	$1.2 \text{ mA} \leq I_s \leq 2.1 \text{ mA}$	$1.2 \text{ mA} \leq I_s \leq 2.1 \text{ mA}$	$1.2 \text{ mA} \leq I_s \leq 5.9 \text{ mA}$
Contact hysteresis	approx. 0.2 mA	approx. 0.2 mA	
Control line impedance	100 Ohm	100 Ohm	50 Ohm
<b>Ex-IS data (as per PTB-certificate)</b>	PTB 00 ATEX 2081	PTB 00 ATEX 2081	PTB 00 ATEX 2043
Voltage	$U_0 \leq \text{DC } 10.6 \text{ V}$	$U_0 \leq \text{DC } 10.6 \text{ V}$	$U_0 \leq \text{DC } 9.6 \text{ V}$
Current	$I_0 \leq 19.1 \text{ mA}$	$I_0 \leq 19.1 \text{ mA}$	$I_0 \leq 19.1 \text{ mA}$
Power rating	$P_0 \leq 51 \text{ mW}$	$P_0 \leq 51 \text{ mW}$	$P_0 \leq 55 \text{ mW}$
IS-classification	[EEx ia] IIC	[EEx ia] IIC	[EEx ia] IIC
Ext. capacitance	2.9 $\mu\text{F}$	2.9 $\mu\text{F}$	650 nF
Ext. inductance	100 mH	100 mH	5 mH
<b>Output</b>			
Relay contacts	1 SPDT	1 ea. SPDT	1 safety directed relay output
Contact rating AC	253 V, 2 A, 500 VA, $\cos \varphi > 0.7$	253 V, 2 A, 500 VA, $\cos \varphi > 0.7$	250 V, 1 A, $\cos \varphi > 0.7$
Contact rating DC	40 V, 2 A; resistive	40 V, 2 A; resistive	24 V, 1 A; resistive
Delay making circuit	approx. 20 ms	approx. 20 ms	20 ms
Delay breaking circuit	approx. 20 ms	approx. 20 ms	20 ms
Max. ON-OFF frequency	10 Hz	10 Hz	5 Hz
<b>Operating conditions</b>			
Min. temperature	-20 °C	-20 °C	-20 °C
Max. temperature	+60 °C	+60 °C	+60 °C
Max. humidity	max. 75%	max. 75%	max. 75%
Ingress protection	IP 20 (EN 60 529 / IEC 529)	IP 20 (EN 60 529 / IEC 529)	IP 20 (EN 60 529 / IEC 529)
<b>Enclosure</b>			
Style	Surface mounting	Surface mounting	Surface mounting
Dimensions per drawing	Form D, page 13	Form F, page 13	Form E, page 13
Mounting	Mounting Snap-fit on 35 mm x 7.5 mm (EN 50 022) rail. Direct mounting possible.		
Weight	approx. 0.15 kg	approx. 0.15 kg	approx. 0.28 kg
Order No.	2014505	2014521	2014548

Further control units are available for operation with a supply voltage between 20 ... 30 V DC:

- Model 904.31 (KFD2-SR2- Ex1.W) - 1 relay output  
Order no: 2114003
- Model 904.32 (KFD2-SR2- Ex2.W) - 2 relay outputs  
Order no: 2143569
- Model 904.33 (KFD2-SH- Ex1) - 1 fail-safe relay output  
(20 ... 35 V DC)  
Order no: 2307618




## Control units for inductive contacts

### Non-Ex-certified versions

(Connection examples see page 21)

#### Control unit model 904.25 MSR 010-I


- For instruments having one inductive contact
- 1 SPDT relay contact
- Surface-mounting case of Form C

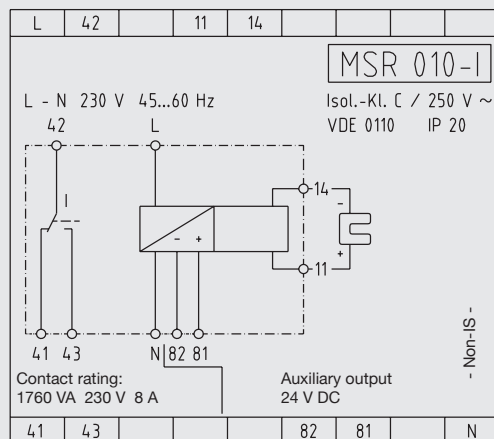

1036726

#### Control unit model 904.26 MSR 020-I


- For 1 instrument having two contacts or two instruments each having one contact
- 2 SPDT relay contacts
- Surface-mounting case of Form C

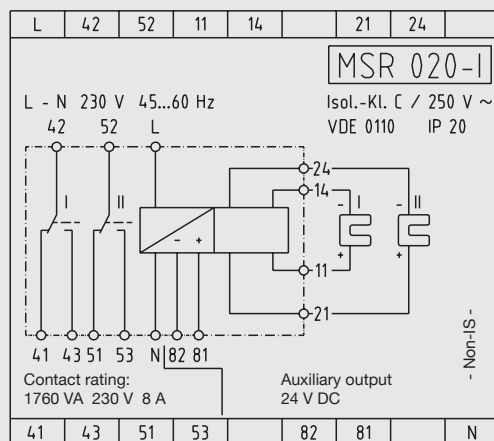

1036742

#### Control unit model 904.27 MSR 011-I

- For 2-point (HI-LO) interval switch for control circuits with model 831.12 alarm contacts
- 1 SPDT relay contact
- Surface-mounting case of Form C

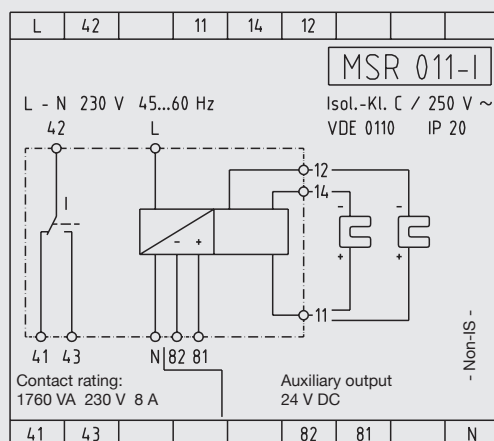

1036734

Specifications for control units	Model 904.25 MSR 010-I	Model 904.26 MSR 020-I	Model 904.27 MSR 011-I
<b>Power supply</b>			
Line voltage	AC 230 V -10% / +6%, 45 ... 60 Hz		
Power consumption	approx. 2.5 VA		
<b>Input</b>			
No. of contacts	1	2	2
Voltage	DC 8.5 V (typical)		
Maximum current	I <sub>k</sub> approx. 5 mA		
Contact actuation	1.5 mA typical		
Contact hysteresis	approx. 0.2 mA		
<b>Output</b>			
Relay contacts	1 SPDT	1 ea. SPDT	2 SPDT
Contact rating	AC 230 V / 8 A / 1760 VA		
Delay making circuit	approx. 10 ms		
Delay breaking circuit	approx. 10 ms		
Auxiliary output	DC 24 V max. 20 mA		
<b>Operating conditions</b>			
Min. temperature	0 °C		
Max. temperature	+70 °C		
Max. humidity	max. 75 %		
Ingress protection EN 60 529 / IEC 529	Case IP 40 / terminals IP 20 (EN 60 529 / IEC 529)		
<b>Enclosure</b>			
Dimensions per drawing	Form C, page 13		
Material	Polyamide 6.6, green		
Mounting	Snap-fit on 35 x 7.5 mm DIN 50 022 rail. Direct mounting feasible.		
<b>Weight</b>	approx. 0.24 kg	approx. 0.27 kg	approx. 0.24 kg

# Incorporating contacts into pressure gauges

## Number of contacts, size of instrument (NS) and minimum scale value

Pressure gauge			Magnetic snap-action contacts				Inductive alarm contact model 831			
Model	NS		model 821				Electronic contact model 830 E <sup>1)</sup>			
		Wiring	Number of contact sets				Number of contact sets			
			1	2	3	4 <sup>2)</sup>	1	2	3 <sup>3)</sup>	4
			Minimum scale value in bar				Minimum scale value in bar			
212.20	100, 160	A	1	1.6	4	4	1	1.6	1.6	-
232.20	100, 160	A	1	1.6	4	4	1	1.6	1.6	-
232.50	100, 160	A	1	1.6	2.5	2.5	0.6	1	1.6	-
233.50	100, 160	A	1	1.6	2.5	2.5	0.6	1	1.6	-
232.30, 233.30	100	A	1	1.6	4	4	1	1.6	1.6	-
232.30, 233.30	160	B	1	1.6	2.5	2.5	0.6	1	1.6	-
232.36	100	A	1	1.6	4	4	1	1.6	1.6	-
214.11 single system	96 x 96	C	1	1.6	4	-	1	1	-	-
214.11 single system	144 x 144	D	1	1.6	2.5	-	1	1	-	-
214.11 single system	144 x 72	D	1	1.6	-	-	0.6	0.6	0.6	0.6
214.11 double system	144 x 72	D	-	-	-	-	0.6	0.6	-	-
312.20	160	A	1 <sup>5)</sup>	1 <sup>5)</sup>	1.6 <sup>5)</sup>	1.6 <sup>5)</sup>	1	1	1.6	-
332.30	160	B	1 <sup>5)</sup>	1 <sup>5)</sup>	1.6 <sup>5)</sup>	1.6 <sup>5)</sup>	1	1	1.6	-
333.30	160	B	-	-	-	-	1	1	1.6	-
4X2.12	100, 160	A	0.025	0.025	0.025	0.025	0.025	0.025	0.025	-
4X3.12	100, 160	A	0.025	0.025	0.025	0.025	0.025	0.025	0.025	-
422.20 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
423.20 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
4X2.30 <sup>4)</sup>	100	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
4X2.30 <sup>4)</sup>	160	B	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
4X3.30 <sup>4)</sup>	100	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
4X3.30 <sup>4)</sup>	160	B	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
4X2.50 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
4X3.50 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
432.36 <sup>4)</sup>	100	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
432.36 <sup>4)</sup>	160	B	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
433.36 <sup>4)</sup>	100	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
433.36 <sup>4)</sup>	160	B	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
432.56 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
433.56 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
532.52	100, 160	A	0.04	0.04	0.04	0.04	0.04	0.04	0.04	-
532.53	100, 160	A	0.04	0.04	0.04	0.04	0.04	0.04	0.04	-
532.54	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
614.11	96 x 96, 144 x 72	D	-	-	-	-	0.04	0.04	-	-
61X.20	100	A	-	-	-	-	0.1	0.1	-	-
6XX.50	100	A	-	-	-	-	0.1	0.1	-	-
632.51	100, 160	A	0.0025	0.0025	-	-	0.0025	0.0025	0.0025	-
711.11	160	A	1	1.6	4	-	1	1	-	-
711.12	100, 160	A	1	1.6	4	-	1	1	-	-
712.20 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
713.20 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
732.02	100	A	1	1.6	4	-	1	1	-	-
732.12	100, 160	A	0.06	0.06	0.1	0.1	0.06	0.06	0.1	-
732.14	100, 160	A	0.06	0.06	0.1	0.1	0.06	0.06	0.1	-
733.12	100, 160	A	0.06	0.06	0.1	0.1	0.06	0.06	0.1	-
733.14	100, 160	A	0.06	0.06	0.1	0.1	0.06	0.06	0.1	-
732.51 <sup>4)</sup>	100, 160	A	0.025	0.025	0.04	0.04	0.025	0.025	0.025	-
736.51	100, 160	A	0.0025 <sup>6)</sup>	0.0025 <sup>6)</sup>	-	-	0.0025	0.0025	0.0025	-

1) Electronic contact model 830 E, only 1 or 2 contacts.

2) It is not possible to set all 4 contacts overlapping.

Either the no. 1 or the no. 4 contact remains at a minimum separation of 30° with 100 mm gauges  
15° with 160 mm gauges.

However, a special version of 160 mm gauge is available upon request.

3) With circular gauges it is not feasible to set all contacts overlapping.

Either the no. 1 or the no. 3 contact remains at a minimum separation of 30° from the other two. However, a special version of 160 mm gauge is available upon request. See also page 11.

4) Pressure range 0 ... 0.025 bar: class 2.5.

5) Without magnet.

6) After feasibility test when intended for flammable gases.

# Incorporating contacts into thermometers

## Number of contacts and size of instrument (NS)

Thermometer		Electrical connections	Magnetic snap-action			Sliding contacts <sup>1)</sup>			Inductive alarm contact model 831		
Model	NS		contacts model 821			model 811			Electronic contact model 830 E <sup>2)</sup>		
			Number of contact sets			Number of contact sets			Number of contact sets		
			1	2	3	1	2	3	1	2	3
55	100	A	on request			x	x	x	x	x	x
55	160	B	on request			x	x	x	x	x	x
73	100	E	x	x	x	x	x	x	x	x	-
73	160	E	x	x	x	x	x	x	x	x	x
73	144 x 144	D	x	x	on request	x	x	on request	x	x	on request


1) Not for liquid-damped gauges

2) Electronic contact model 830 E, only 1 or 2 contacts


## Standard electrical connections

The letter indicates the standard wiring method of pressure gauges and thermometers incorporating 1 or 2 contacts. "Left" or "right" refers to an observer facing the dial of the instrument.

A Junction box made of PA 6, black, ingress protection IP 65  
Temperature resistance -40 °C to +80 °C, per VDE 0110  
Insulation group C / 250 V  
Cable gland M20 x 1.5 (bottom entry) with retainer clamp, 6 + screw terminals + PE for wire cross section 2.5 mm<sup>2</sup> mounted at the right-hand side of the case



B Junction box made of PA 6, black, ingress protection IP 65  
Temperature resistance -40 °C to +80 °C, per VDE 0110  
Insulation group C / 250 V  
Cable gland M20 x 1.5 (bottom entry) with retainer clamp, 4 screw terminals + PE for wire cross section 2.5 mm<sup>2</sup> mounted at the right-hand side of the case



C Block of terminals, for wire cross section 2.5 mm<sup>2</sup>, mounted at the back of the case


D Block of rack-mounting terminals DIN 41 611 per VDE 0110  
Insulation group C, for wire cross section 2.5 mm<sup>2</sup>, mounted at the back of the case or chassis

E Junction box as A, but mounted at the left-hand side of the case

For instruments incorporating 3 or more contacts and special versions of contacts: wiring on request.


### Dimensions in mm (Examples)

### Gauge with contacts NS 100

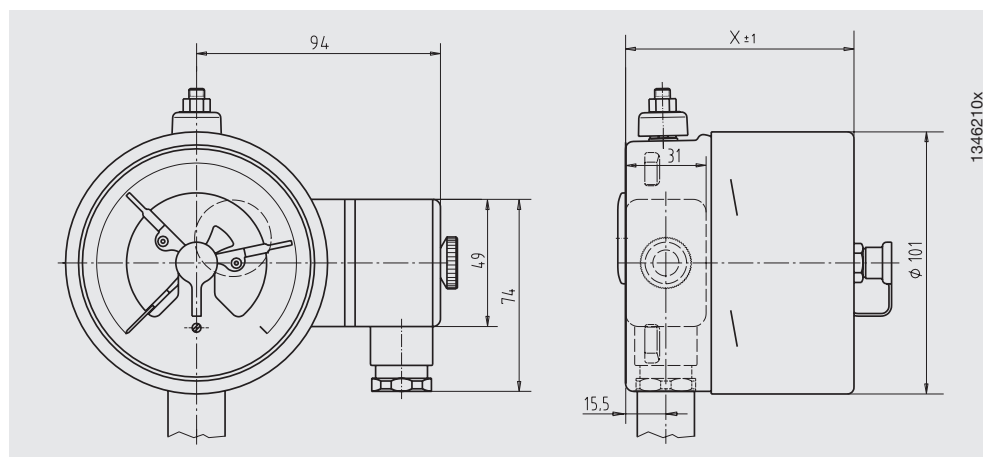

Kind of contact	Dimension X in mm
Single or double contacts	88
Double contacts (change-over)	113
Triple contacts	96
Quadruple contacts	113

### Gauge with contacts NS 160

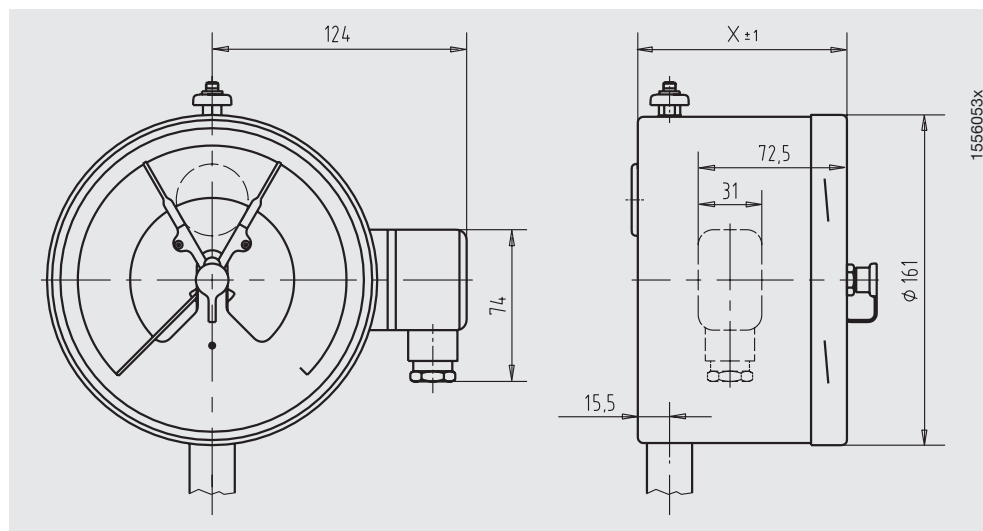


Kind of contact	Scale range	Dimension X
Single or	up to 0 ... 60 bar <sup>1)</sup>	102 mm
double contacts	≥ 0 ... 100 bar	116 mm
Triple or	up to 0 ... 60 bar <sup>1)</sup>	116 mm
Quadruple contacts	≥ 0 ... 100 bar	129.5 mm


1) also for thermometers

## Connection examples for inductive alarm contacts

Ex version, with model 904.28/29/30, K\*A6-SR2(SH)-Ex control units

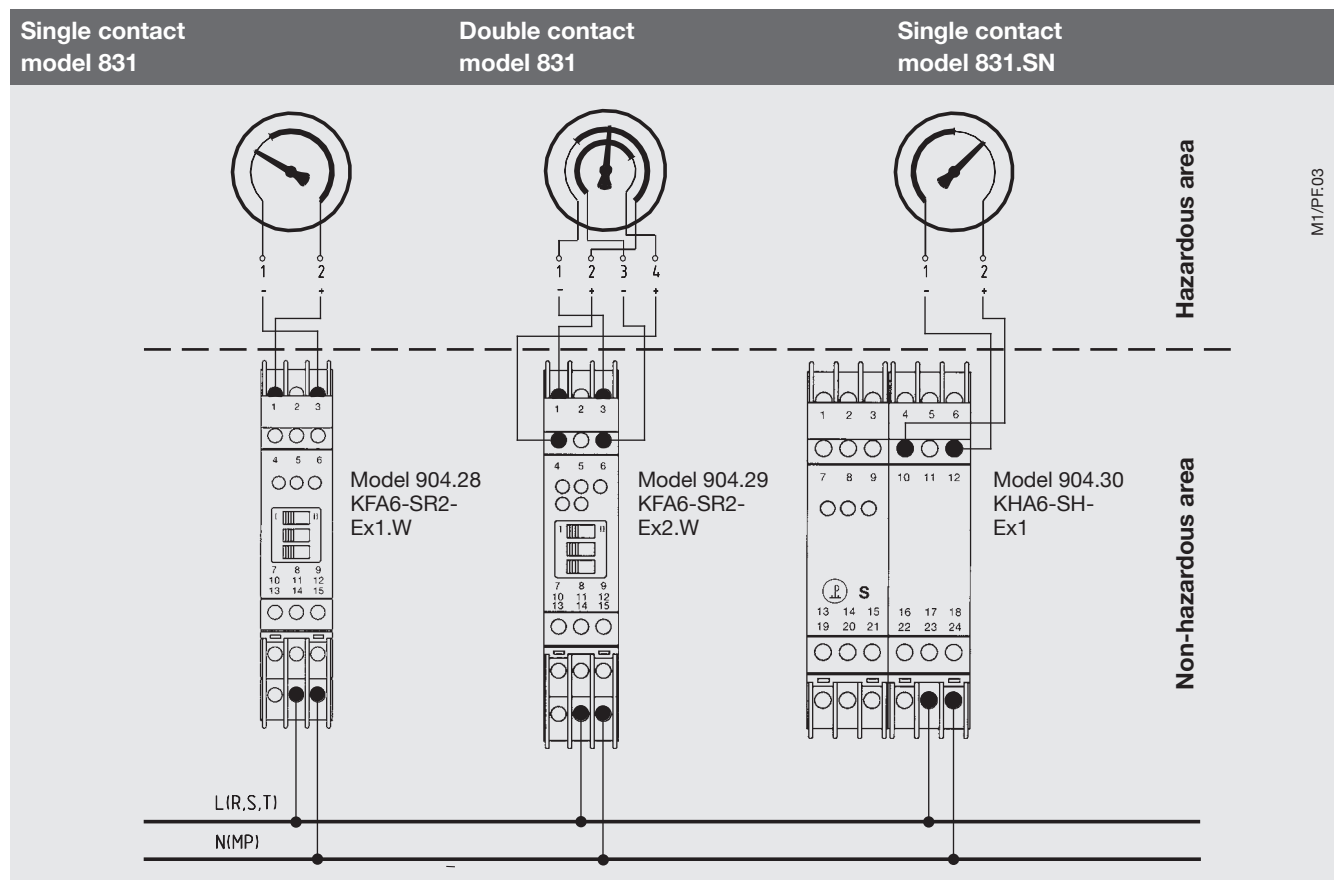

Non-Ex version, with model 904.2X control units

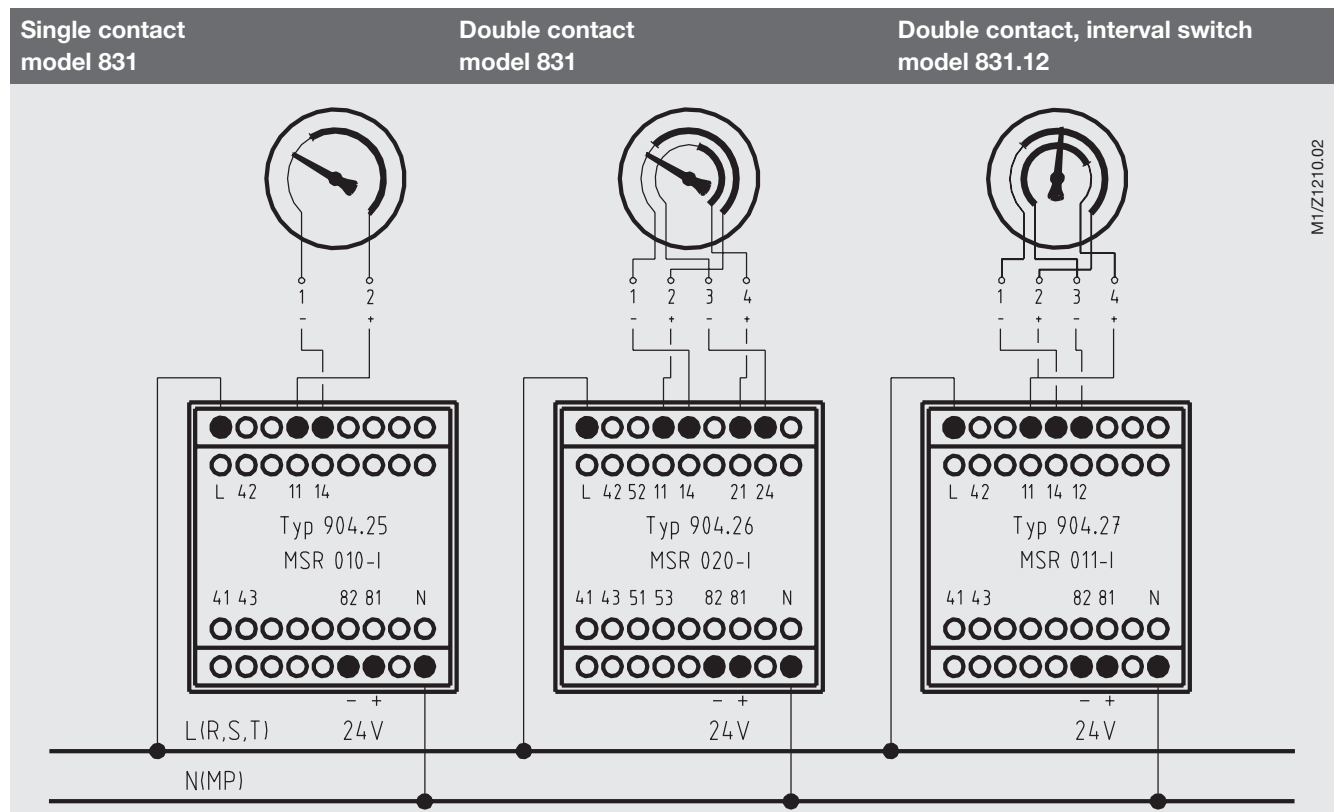

Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing.  
Modifications may take place and materials specified may be replaced by others without prior notice.



**WIKA Alexander Wiegand GmbH & Co. KG**  
Alexander-Wiegand-Straße 30  
63911 Klingenberg/Germany  
Tel. (+49) 9372/132-0  
Fax (+49) 9372/132-406  
E-mail [info@wika.de](mailto:info@wika.de)  
[www.wika.de](http://www.wika.de)